


Project News

Edition 10 May 2011

Yallourn Power Station Boiler Dance Floor

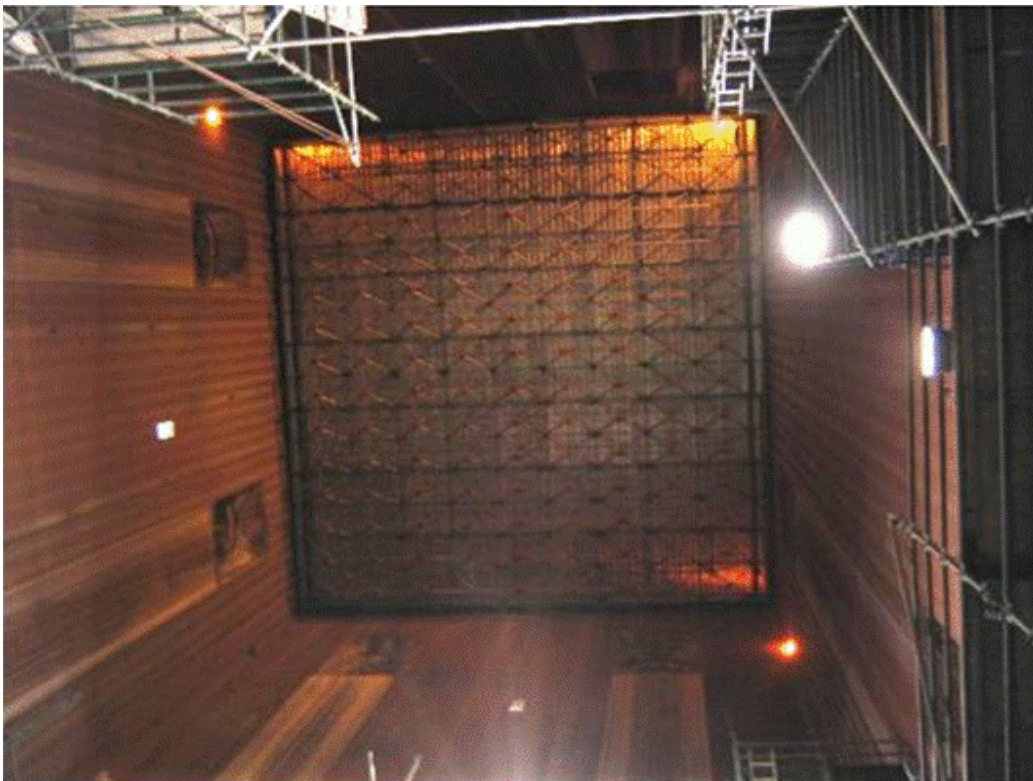

Capitalising on our recent experiences on the West Gate Bridge Project and utilising our new Technitrusse equipment and hoisting systems, APS Industrial Services division has recently been involved with the 2011 Unit 4 Outage at TruEnergy's Yallourn Power Station in the Latrobe Valley.

Working for the boiler contractor BMC Welding of Morwell, APS successfully installed, operated and dismantled the internal boiler suspended dance floor. Measuring in at 15m x 15m, the dance floor was utilised to act as a separation deck between the superheater elements and the furnace area enabling parallel work flows to be carried out within the boiler.

Utilising its impressive loadbearing capacity, the suspended dance floor weighing in at 11 ton was rigged in such a way that two x one ton replacement super heater elements could be brought into the boiler and stored on the dance floor in preparation for lifting into position. Additional to the elements the platform was rated for 15 people plus tools and equipment.

For more information on the services APS can provide for your outage please call

03 9359 2014

aps
CONTRACT
SERVICES